## PRODUCT INFO




## **QUICK-LOCK2.1 SYSTEM**

Automatically locking mounting system for panniers







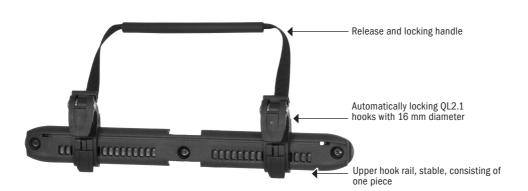



## **SPECIFICATIONS:**

- + QL2.1 system for all standard racks with a diameter up to 16 mm
- + 20 mm hook set available as optional accessory for racks with larger tube diameter
- + Hooks close automatically
- + Reduction inserts in size 8, 10 and 12 mm (included) can be inserted into hooks for smaller tube diameters ensuring tight fit
- + Wide adjusting range of the QL2.1 hooks on the rail
- + Strong torsion-resistant upper rail consisting of one piece with three-point attachment to bag
- + Variable angle of pivotable rail (models Office-Bag and Downtown) allows plenty of legroom
- + Wide adjustment range (horizontally and vertically) of the lower rotatable hook (in 15° steps) on the lower rail
- + Fast adjusting of all hooks without requiring any tools
- + Quick exchange of hook inserts without requiring any tools (lateral inserting of reduction inserts into hooks)
- + Lower hook rail made of two-component "hard-soft" synthetic reduces abrasions on carrier

**Optional accessories:** Anti-Theft Device (No. E125 long, E124 short), QL2.1 hook 20 mm (E193), QL2 Lock / QL2 Lock keyed alike (F3913/F3915)

Attention: Maximum load per pannier is 9kg / 20 lbs. We recommend weighing each loaded pannier to confirm that the maximum allowance of the pannier fixation is not exceeded. This practice is advised for both rear and front panniers. CAUTION: The maximum weight capacity of every carrier model is different. Please observe the maximum weight allowance of the carrier fitted to your bicycle. Note: Sometimes the maximum capacity of the panniers fixing system can exceed the maximum capacity of the carrier. DO NOT exceed the maximum capacity of the carrier! Note, that the use of panniers will significantly influence the handling properties of your bicycle.